

CIR-V4DASJ2408G

DDR4 Registered DIMM 2400MHz 8GB

Description

This specification defines the electrical and mechanical requirements for 288 pin, 1.2 V (VDD), Double Data Rate, Synchronous DRAM Dual In-Line Memory Modules.

Reference design examples are included which provide an initial basis for DDR4 R-DIMM designs. Modifications to these reference designs may be required to meet all system timing, signal integrity and thermal requirements for DDR4-2400 support.

Specifications

Density	8GB
Pin Count	288pin
Type	Registered
Dimensions	133.35mm x 31.25mm
ECC	with ECC
Component Config	512M x 8 bit
Data Rate	2400 MHz
CAS Latency	17
Voltage	1.2V
PCB Layers	8
Operating Temp.(TCASE)	0°C~+85°C
Module Ranks	Dual Rank

Features


- 288-pin Registered Dual Inline Memory Module (RDIMM)
- Organization: 1Gx72 based on 512Mx8(4Gb) * 18 components / 2 Ranks
- JEDEC standard 1.2V (\pm 0.06V) Power Supply
- VDDQ = 1.2V (\pm 0.06V)
- 16 Banks (4 Bank Groups)
- Programmable CAS Latency: 11,12,13,14,15,16,17
- Burst Length: 8(Interleave/nibble sequential)
- Bi-directional Differential Data-Strobe
- On Die Termination (ODT)
- Average Refresh Period 7.8us at lower than a TCASE 85°C, 3.9us at 85°C < TCASE < 95 °C
- RoHS Compliant

Speed Grade

Frequency Grade	Data Transfer Rate	CAS Latency Support							CL-tRCD-tRP
		CL11	CL12	CL13	CL14	CL15	CL16	CL17	
DDR4-2400	PC4-19200	1600	1600	1866	1866	2133	2133	2400	17-17-17

Package Dimensions

Unit: mm

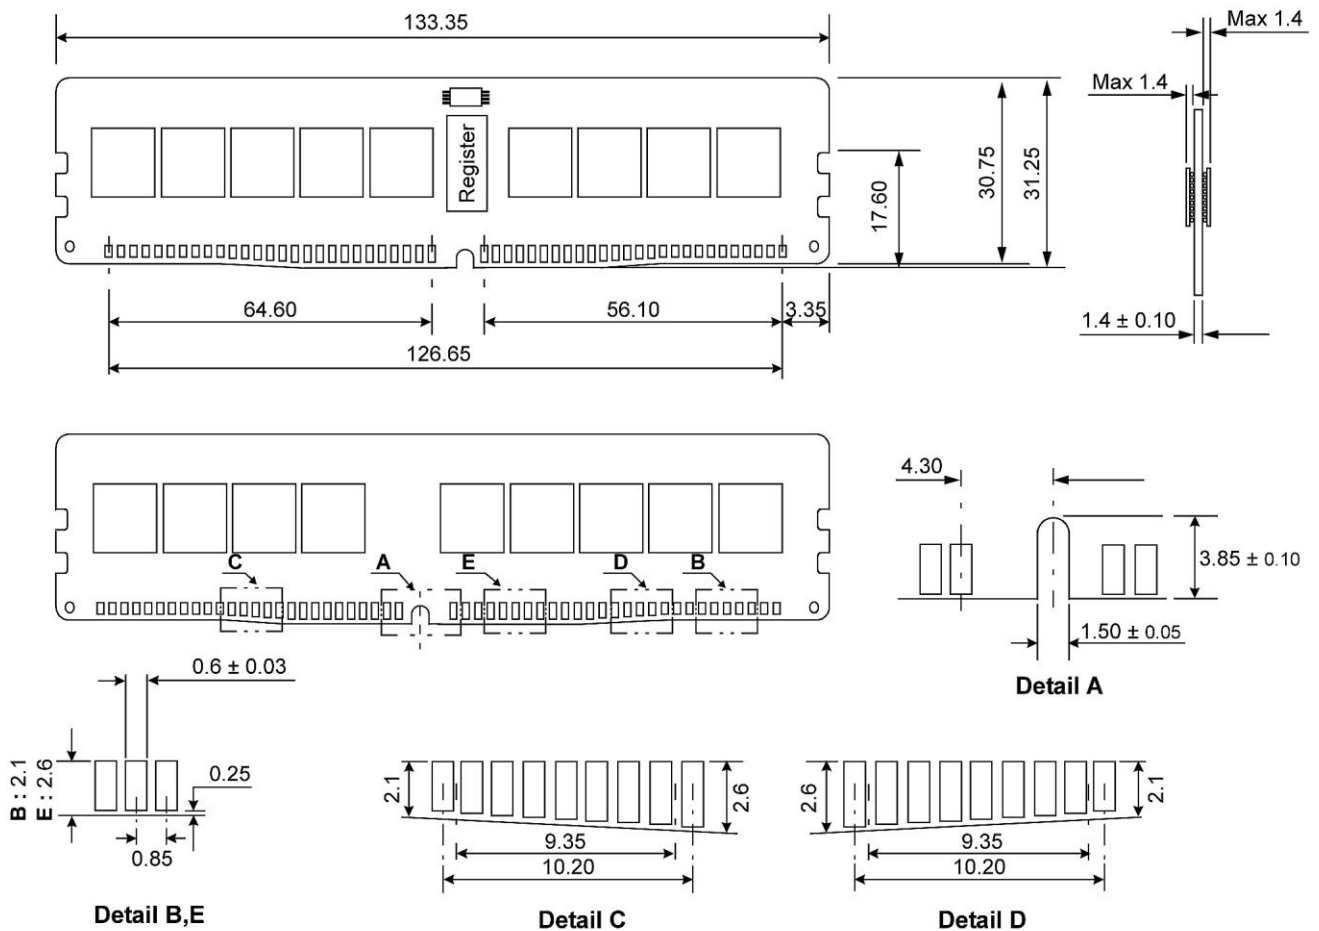

Tolerances : ± 0.15 mm unless otherwise specified