

Cervoz® FlashMonitor

Solid State Drive Monitoring Software

User Manual



Date: 2024.01.12

Revision: 3.1

File: Cervoz_FlashMonitor_User_Manual_Rev3.1

Revision History

Date	Revision	Description
2016/7/18	1.0	First Released
2016/8/23	1.1	Improved platform compatibility issues
2018/2/23	1.2	New SSD Series support list added
2019/5/2	2.0	1. New SSD Series support list added 2. New function added A. Popup Alert B. Support USB Connection
2019/12/11	2.1	1. New SSD Series Added. (Titan Series in Windows version)
2023/8/11	3.0	1. New SSD Series Added. (Titan Series in Windows version)
2024/1/12	3.1	1. New function added Support SATA and NVMe SSD in RAID mode

Table of Contents

1. Overview.....	4
2. Cervoz Solid State Drive Families & OS Supported.....	4
2.1 Cervoz Solid State Drive Families Supported.....	4
2.2 OS Supported.....	4
3. Autorun Setting.....	5
3.1 Function Setting.....	5
3.2 Modify Autorun Setting.....	5
4. Welcome Page.....	6
5. Main Page.....	7
6. Disk Information.....	8
7. Health Status.....	9
8. SMART.....	10
9. Tool.....	11
9.1 Alert	12
9.1.1 Alert Setting.....	12
9.1.2 Email Setting.....	13
9.1.3 Popup Alert	14
9.2 Security Er	15
9.2.1 Reminders.....	15
9.2.2 Security Erase function.....	16
10. System Details.....	17

1. Overview

Cervoz FlashMonitor is specialized flash disk monitoring software developed in-house dedicated to monitoring disk's health for Cervoz Solid State Drives. Disk relevant information and health conditions can be checked and monitored in real time, preventing functional degradation and predicting disk lifespan.

Cervoz® FlashMonitor Features:

- ✓ Disk Information
- ✓ Health Status
- ✓ SMART Information
- ✓ Tool (Alert)
- ✓ System Details

2. Cervoz Solid State Drive Families & OS Supported

2.1 Cervoz Solid State Drive Families Supported

Cervoz Series	Families
Supreme Series (SLC)	All
Reliance Series (RO-MLC)	All
Momentum Series (MLC)	All
Titan Series (TLC)	All (Note)

Note : Titan Series is only can be monitored in the Windows version.


2.2 OS Supported

Operation Software Support	
Windows	Windows 7
	Windows 8
	Windows 10

3. Autorun Setting

3.1 Function Setting


Double click the exe file to run Cervoz FlashMonitor, users can choose Yes/No to decide whether users wish to execute software automatically when entering the operating system.

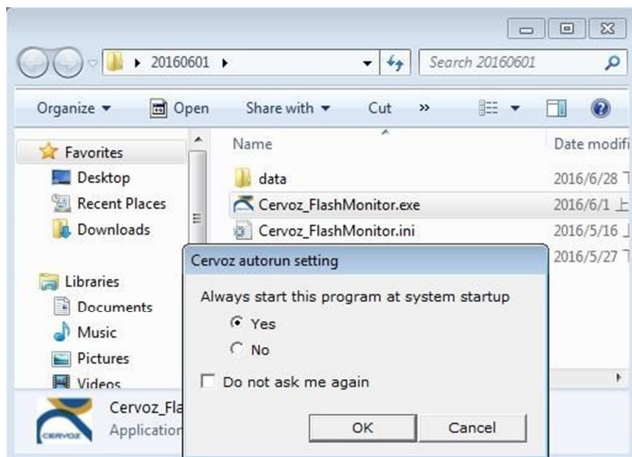


3.2 Modify Autorun Setting

Operating procedures:

1. Windows Start → All Programs → Accessories → Run or Keyboard “Windows Key” + “R”

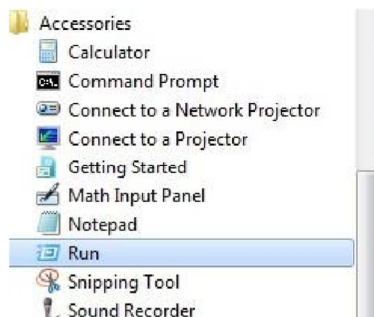


2. Type in command “msconfig” and click OK.

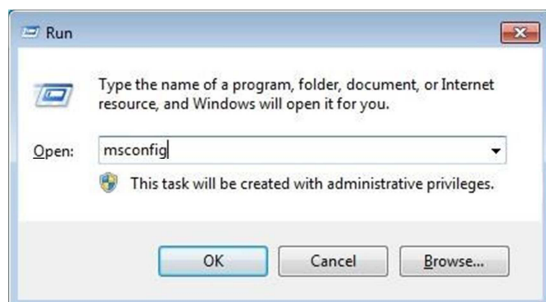

3. Below is the system configuration interface, select Startup Page.

- (1) Untick “Cervoz FlashMonitor Application”, click OK.
- (2) Restart software, users will receive the Autorun setting window again.

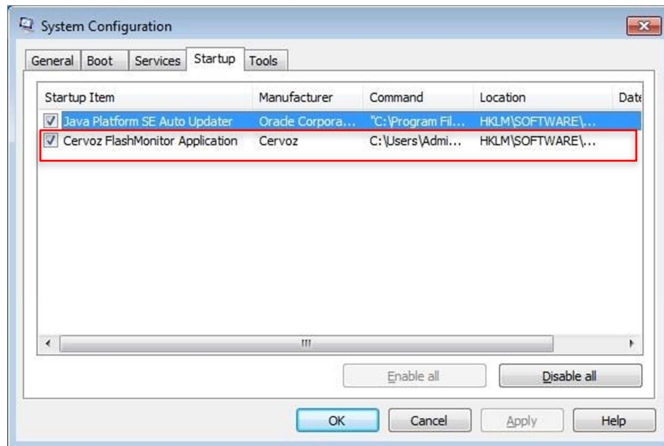


4. Welcome Page

The program is starting... Please wait a few seconds.



5. Main Page


Users can select between Cervoz FlashMonitor functions by using the menu panel. Users can go back to home page by clicking  icon at any time.

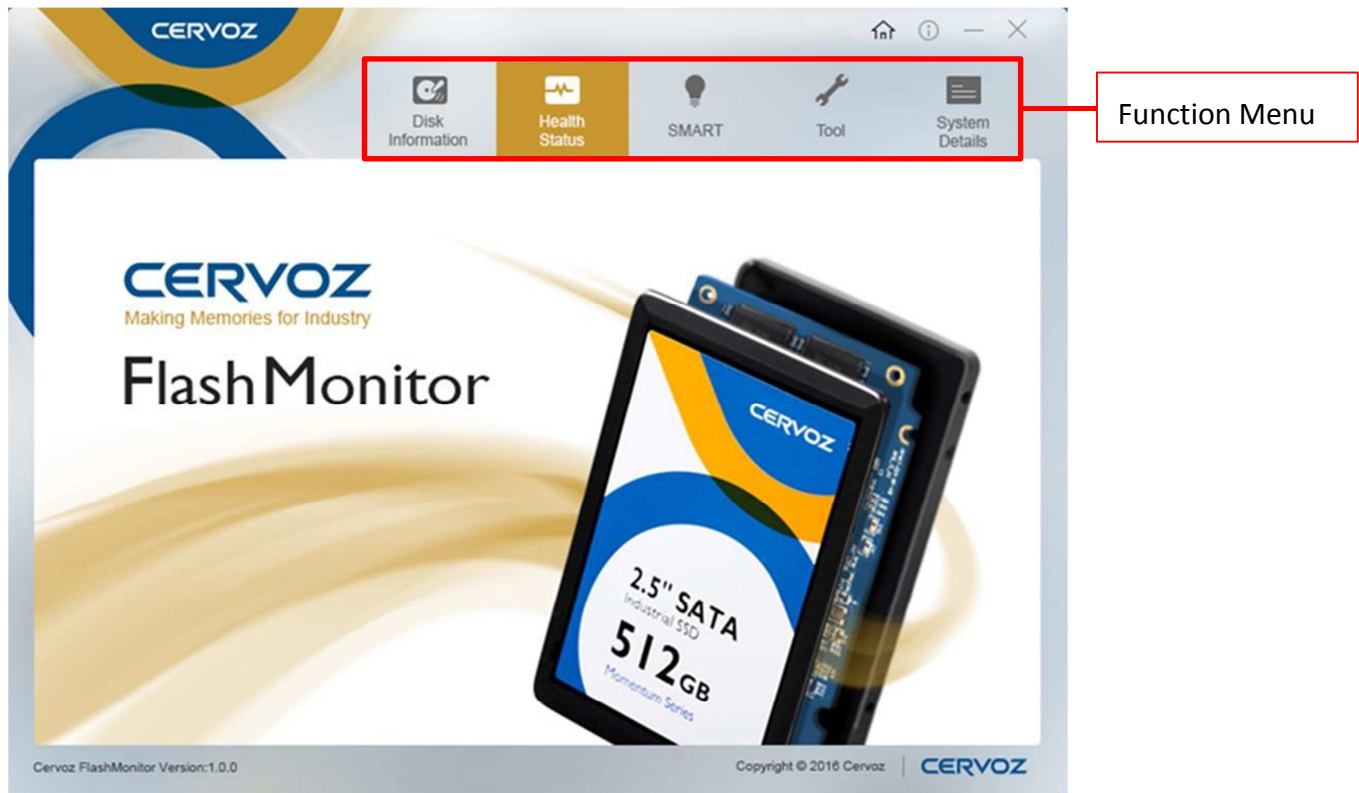

6. Disk Information

The Disk Information page provides all Cervoz disk information, including part number details, firmware version, LBA value, disk capacity status, temperature value and many more.

Special supported features can be acknowledged on this page as well.

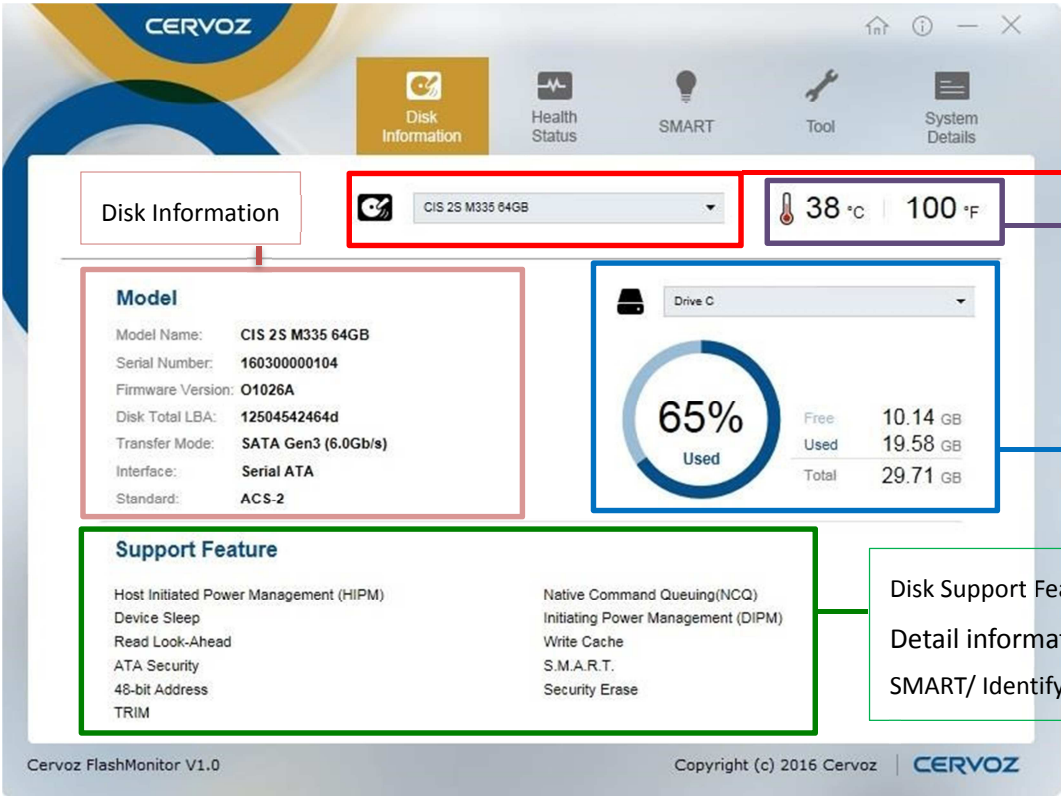

The screenshot shows the 'Disk Information' page of the Cervoz FlashMonitor V1.0 software. The interface includes a top navigation bar with icons for Disk Information, Health Status, SMART, Tool, and System Details. The main content area is divided into several sections:

- Disk Menu:** A dropdown menu showing 'CIS 2S M335 64GB'.
- Disk Temperature*:** A temperature gauge showing 38 °C and 100 °F.
- Disk Capacity:** A circular progress indicator showing 65% used, with a table of capacity details:

Category	Value
Free	10.14 GB
Used	19.58 GB
Total	29.71 GB
- Disk Information:** A box containing the following details:
 - Model Name: CIS 2S M335 64GB
 - Serial Number: 160300000104
 - Firmware Version: O1026A
 - Disk Total LBA: 12504542464d
 - Transfer Mode: SATA Gen3 (6.0Gb/s)
 - Interface: Serial ATA
 - Standard: ACS-2
- Disk Support Features:** A box listing supported features:
 - Host Initiated Power Management (HIPM)
 - Device Sleep
 - Read Look-Ahead
 - ATA Security
 - 48-bit Address
 - TRIM
 - Native Command Queuing (NCQ)
 - Initiating Power Management (DIPM)
 - Write Cache
 - S.M.A.R.T.
 - Security Erase


Callouts from the right side of the image point to these sections: 'Disk Menu', 'Disk Temperature*', 'Disk Capacity', and 'Disk Support Features'. A green box on the right contains the text: 'Detail information check by : SMART/ Identify Disk Information'.

Note: The temperature shown in software is the temperature of the controller IC, it is normally much higher than the ambient temperature of the Solid State Drive.

7. Health Status


The Health Status page provides Cervoz disk health status in percentage, estimated lifespan, power on hours, power cycle count, and erases count values.

User can choose to monitor Cervoz disk's health degradation by day, month or year.

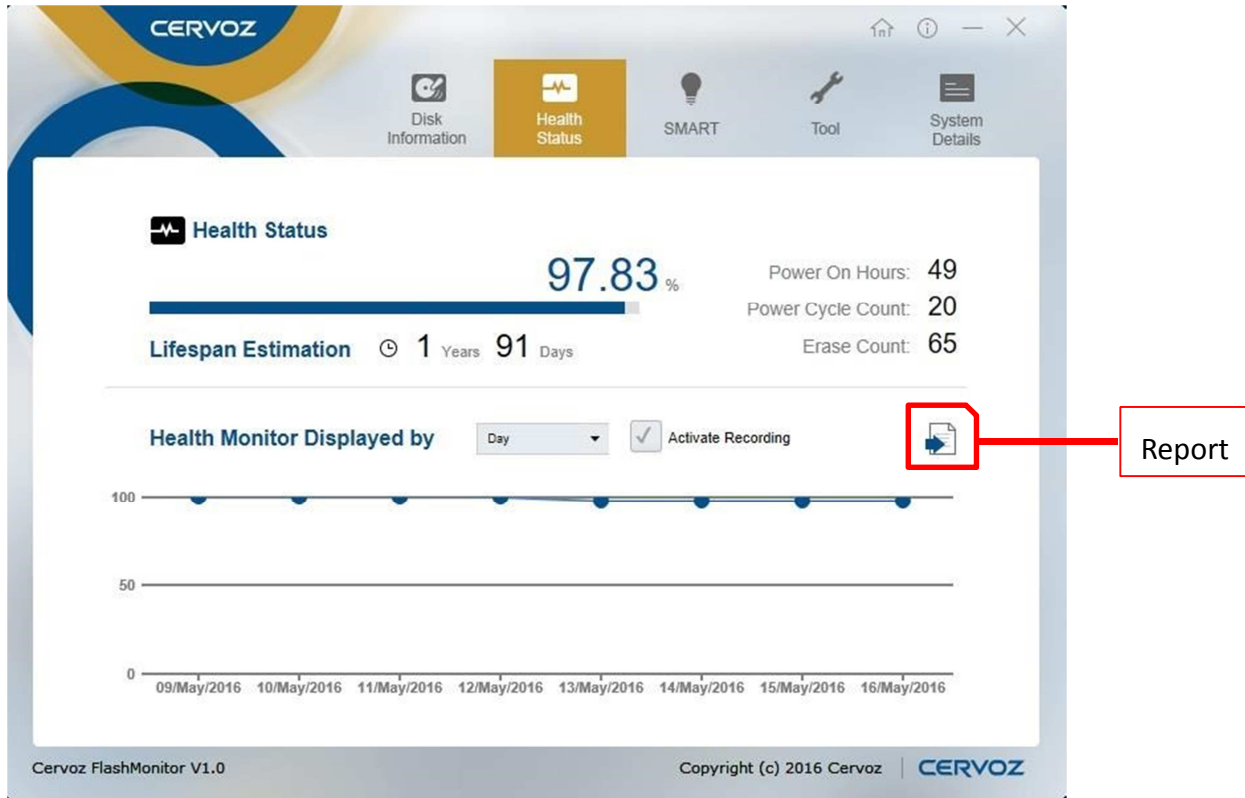

Users can click “Report” to export reports of the health status of the Solid State Drive.

This report will be saved as an Excel file. It contains exported Date, Health, and Erase Count.

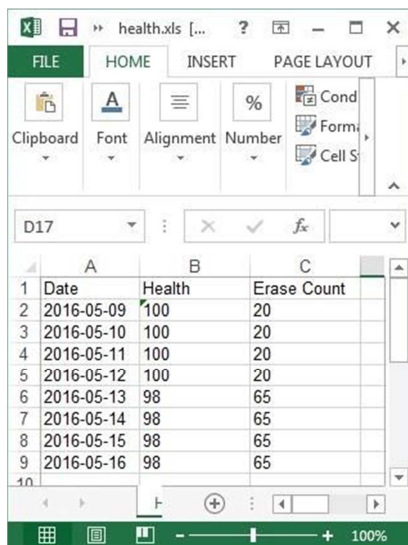

	A	B	C
	Date	Health	Erase Count
1	2016-05-09	100	20
2	2016-05-10	100	20
3	2016-05-11	100	20
4	2016-05-12	100	20
5	2016-05-13	98	65
6	2016-05-14	98	65
7	2016-05-15	98	65
8	2016-05-16	98	65

8. SMART

The SMART page provides full information of the Cervoz disk's SMART values.

Users can easily access to inspect SMART information of the Cervoz disk at any time.

SMART Definition:


Self-Monitoring, analysis, and reporting Technology for prediction of device degradation and/or faults.

IDENTIFY (PACKET) DEVICE and SET FEATURES:

In the IDENTIFY DEVICE command various parameters are communicated to the host from the device. The following sections define those words (Identify ID: 0~255) that are different from and additions to the ATA/ATAPI-6 standard definition of the data contents.

Serial ATA features and capabilities include a means by which their presence and support may be determined, and a means for enabling them if optionally supported.

The IDENTIFY (PACKET) DEVICE settings requirements shall be implemented by native Serial ATA devices.

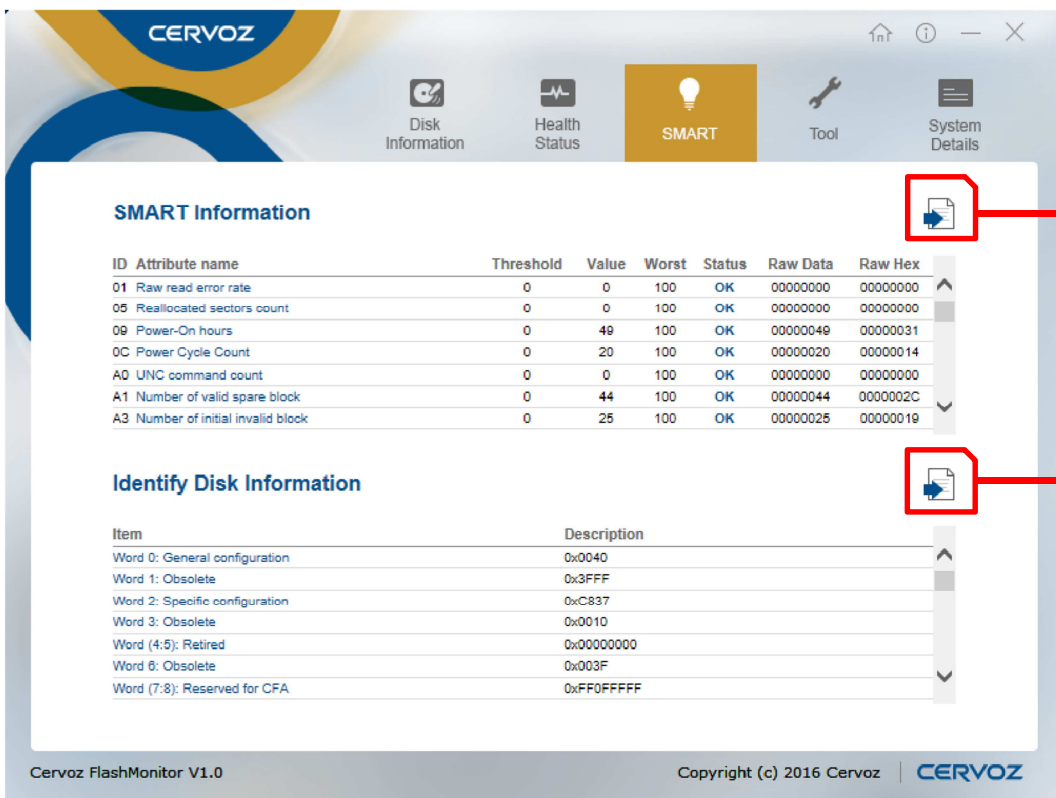

SMART Information

ID	Attribute name	Threshold	Value	Worst	Status	Raw Data	Raw Hex
01	Raw read error rate	0	0	100	OK	00000000	00000000
05	Reallocated sectors count	0	0	100	OK	00000000	00000000
09	Power-On hours	0	49	100	OK	00000049	00000031
0C	Power Cycle Count	0	20	100	OK	00000020	00000014
A0	UNC command count	0	0	100	OK	00000000	00000000
A1	Number of valid spare block	0	44	100	OK	00000044	0000002C
A3	Number of initial invalid block	0	25	100	OK	00000025	00000019

Identify Disk Information

Item	Description
Word 0: General configuration	0x0040
Word 1: Obsolete	0x3FFF
Word 2: Specific configuration	0xC837
Word 3: Obsolete	0x0010
Word (4:5): Retired	0x00000000
Word 6: Obsolete	0x003F
Word (7:8): Reserved for CFA	0xFF0FFFFFFF

Cervoz FlashMonitor V1.0 Copyright (c) 2016 Cervoz


Users can click “Report” to export the report of the health status of the Solid State Drive. This report will be saved as an Excel file.

9. Tool

The Tool page offers two functions:

9.1. **Alert** – Users can easily set up alert parameters of the Cervoz disk; once figures reach the set parameters, system would immediately send out emails, so that user is in complete control. Parameters can be set for temperature, capacity, and health status and lifespan estimation.

9.2. **Security Erase** – With a simple click, user can erase all of Cervoz disk.

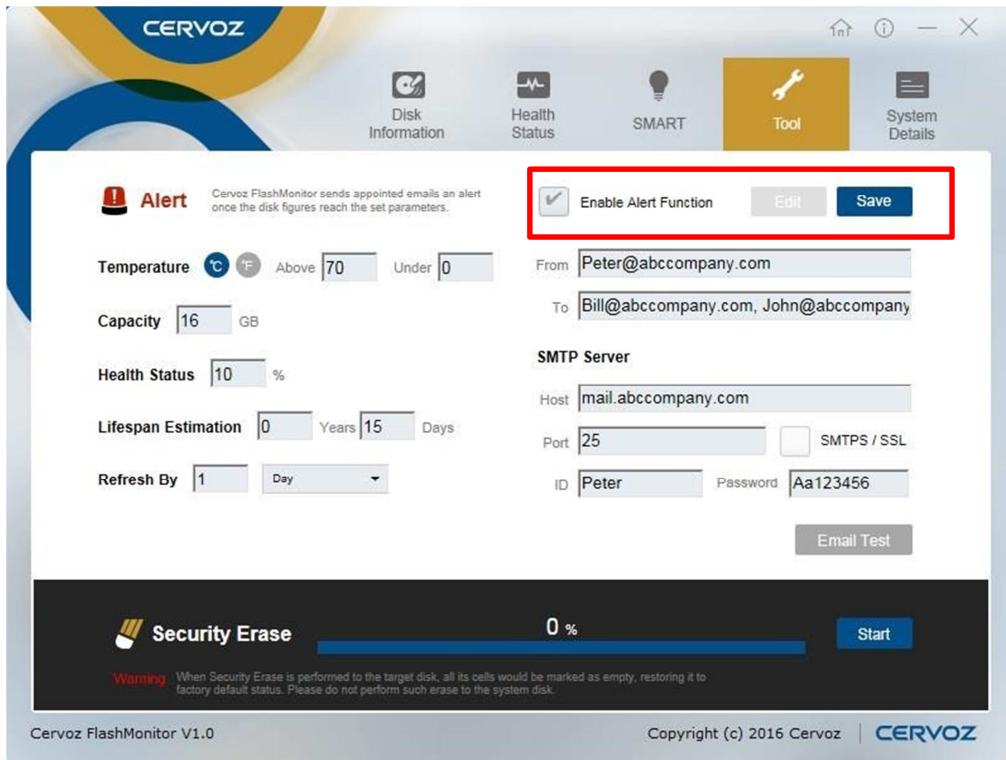

Alert Cervoz FlashMonitor sends appointed emails an alert once the disk figures reach the set parameters.

☒ Enable Alert Function

From: Peter@abccompany.com

To: Bill@abccompany.com, John@abccompany.com

SMTP Server

Host: mail.abccompany.com

Port: 25 ☐ SMTPS / SSL

ID: Peter Password: Aa123456

Security Erase 0 %

Warning When Security Erase is performed to the target disk, all its cells would be marked as empty, restoring it to factory default status. Please do not perform such erase to the system disk.


Cervoz FlashMonitor V1.0 Copyright (c) 2016 Cervoz **CERVOZ**

Start Alert Function:

- (1) Click "Edit"
- (2) Tick "Enable Alert Function"
- (3) The function will officially start after clicking "Save" once all parameter setting is completed

9.1 Alert

9.1.1 Alert Setting

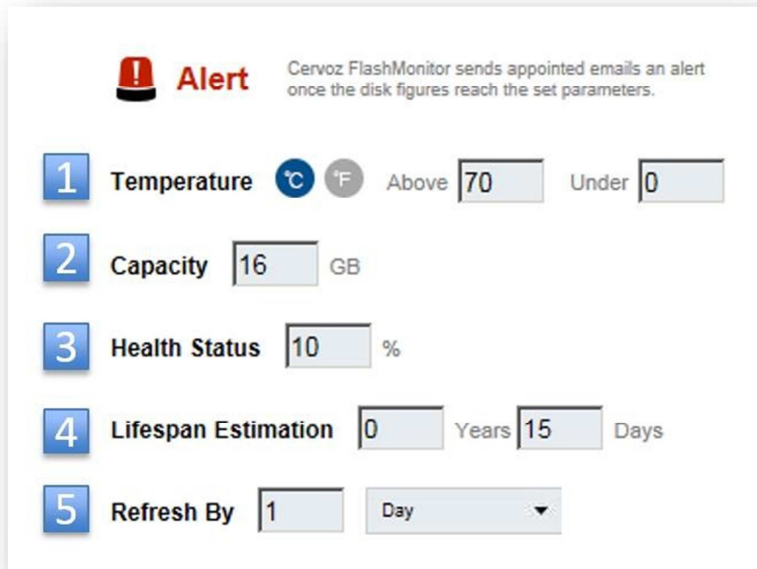

Alert Cervoz FlashMonitor sends appointed emails an alert once the disk figures reach the set parameters.


- Temperature** ☒ °C ☐ °F Above Under
- Capacity** GB
- Health Status** %
- Lifespan Estimation** Years Days
- Refresh By**

1. Temperature:
 - (1) Choose °C or °F
 - (2) Above: Highest Temperature (3 digits)
 - (3) Under: Lowest Temperature (3 digits)
2. Capacity: Desired capacity
3. Health Status: Desired health percentage
4. Lifespan Estimation: Desired lifespan
5. Refresh By: Refresh software detection by Day, Month or Year

Note:

- a. Field #1~#4 is optional.
- b. Field #5 "Refresh By" is mandatory.

9.1.2 Email Setting

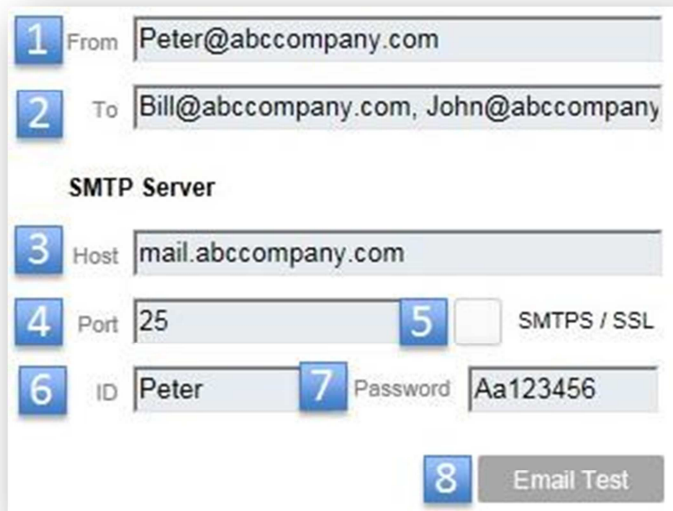

The dialog box contains the following fields and controls:

- 1 From:** Text field with value "Peter@abccompany.com"
- 2 To:** Text field with value "Bill@abccompany.com, John@abccompany"
- SMTP Server** section:
 - 3 Host:** Text field with value "mail.abccompany.com"
 - 4 Port:** Text field with value "25"
 - 5** ☐ **SMTPS / SSL**
 - 6 ID:** Text field with value "Peter"
 - 7 Password:** Text field with value "Aa123456"
 - 8** **Email Test** button

1. From: The administrator's e-mail address
2. To: The e-mail addresses of persons that need to be alerted (Maximum 100 persons) **Note:**
Segment with a comma between e-mail addresses.


SMTP Server

1. Host: Mail server
2. Port: Account Type/Server Port (e.g. POP3/Port : 25)
3. SMTPS / SSL: Activate SSL encryption

Note: Please confirm that sever port is correct when SSL function is enabled.



ID: The Sender's e-mail ID

1. Password : The password of sender's e-mail
2. Email Test : After filling field #1~#7, you can test the setting before saving it Once test is successful, the following window is shown.

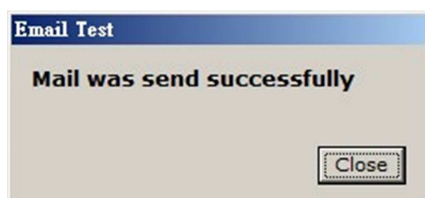

9.1.3 Popup Alert

1. Once the alert function enables, the Popup alert will be active.

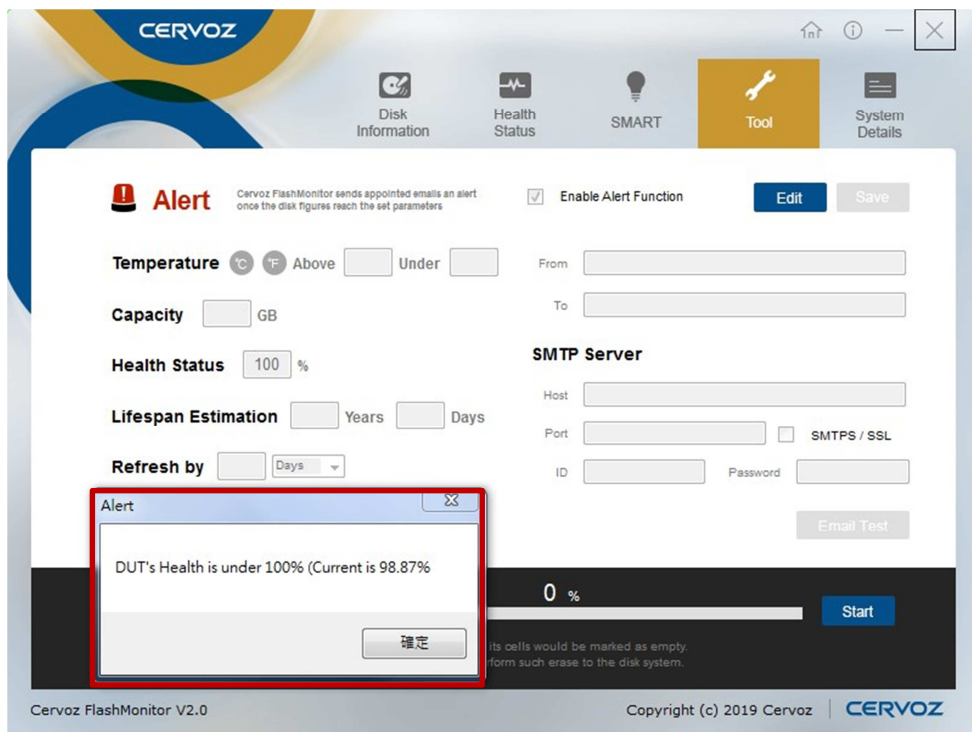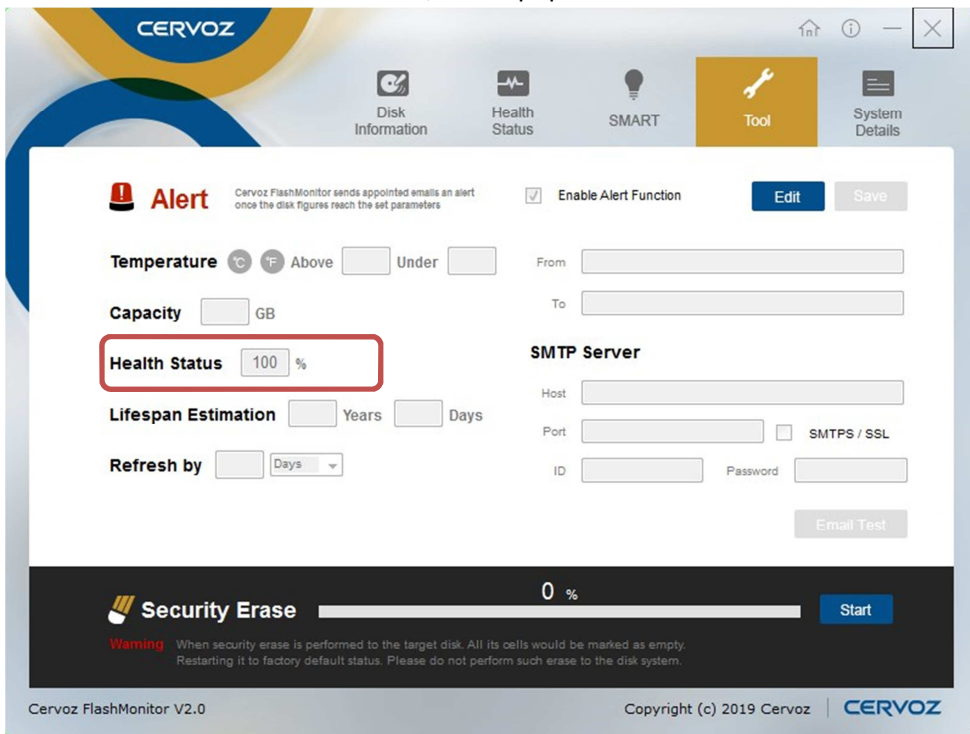


2. The popup alert will show again after 60 seconds if the alert parameter does not change or does not disable the alert function.

9.2 Security Erase


9.2.1 Reminders


1. Running the Security Erase command will permanently delete all the data on disk, if users want to continue this process, click “Yes.”

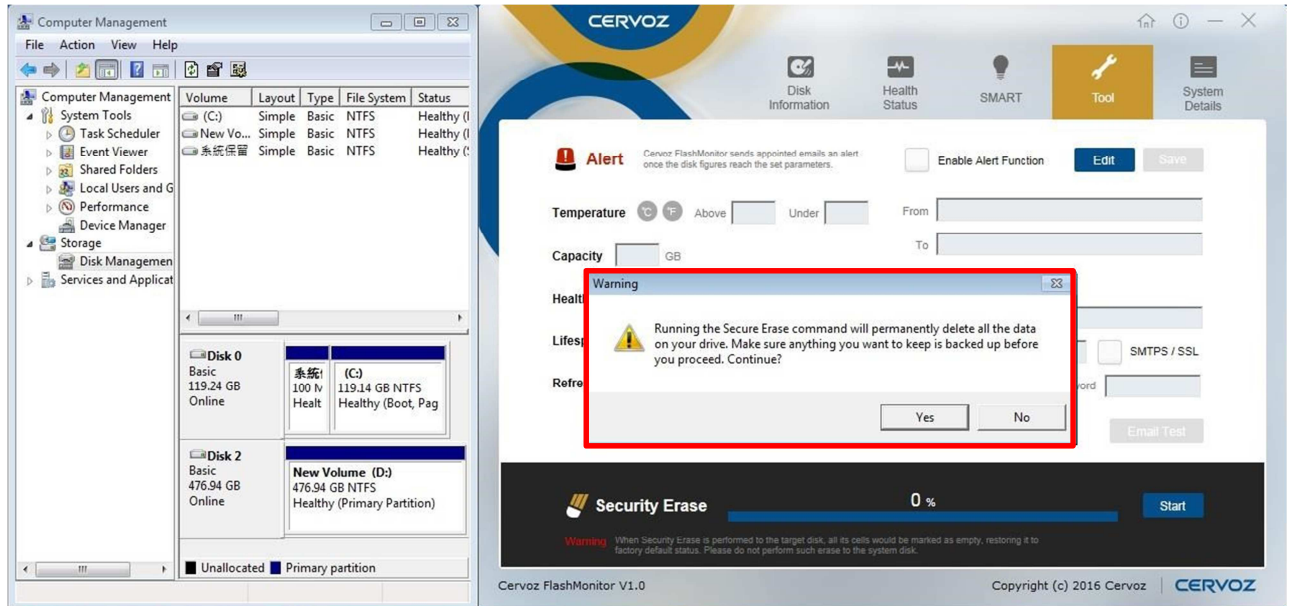

2. Please remove the file system if the error message of “Please remove the file system first” is popped out.



Note: After users remove the file system, Cervoz FlashMonitor must be restarted.

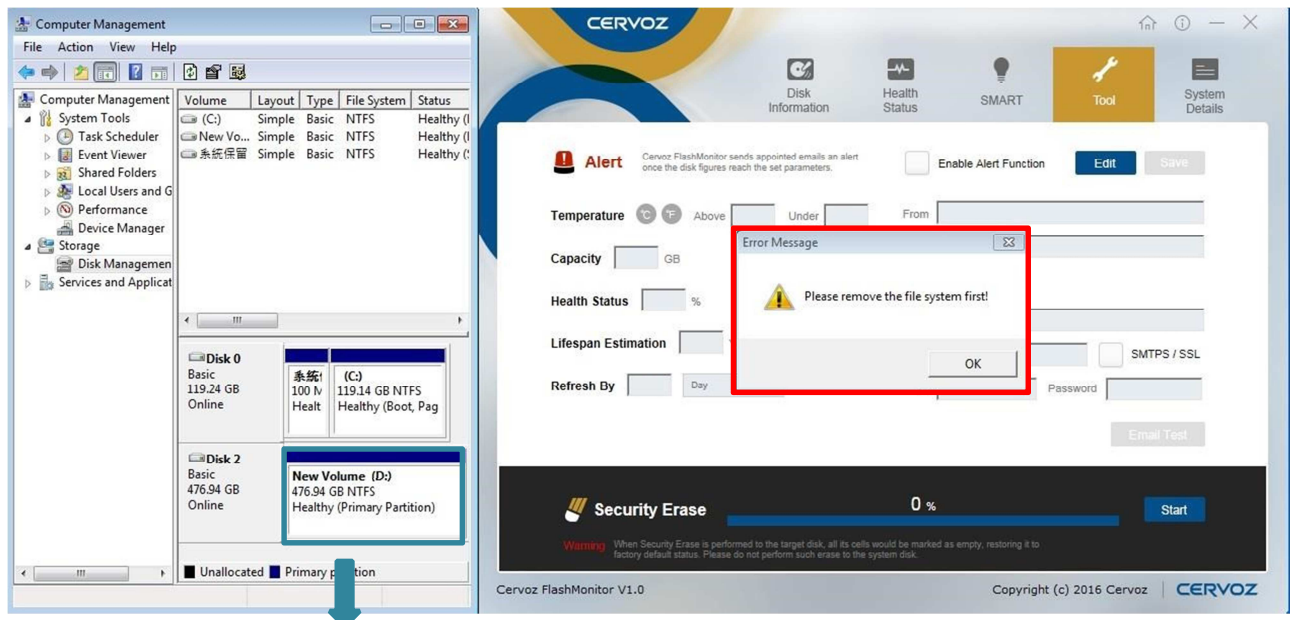

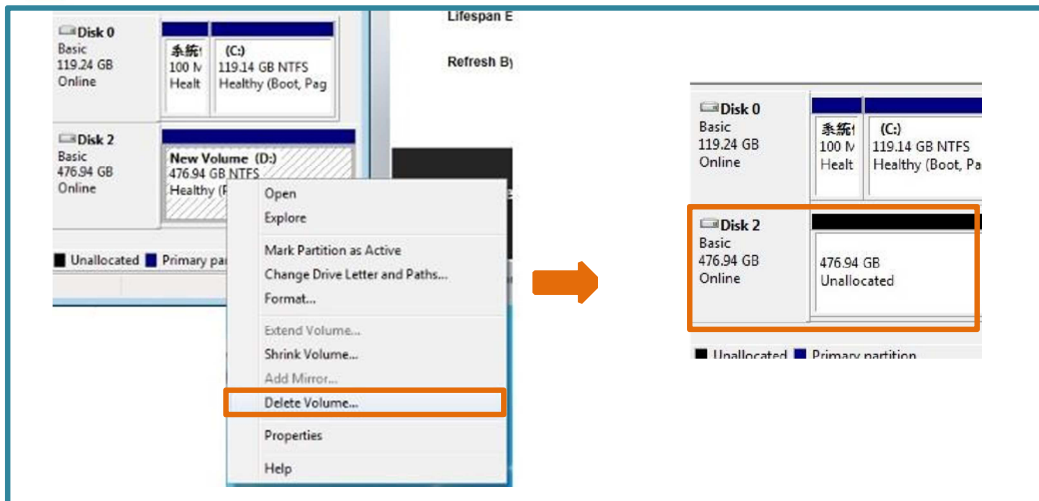


9.2.2 Security Erase function

1. Executing Security Erase Function, click “Yes” to continue ERASE function.

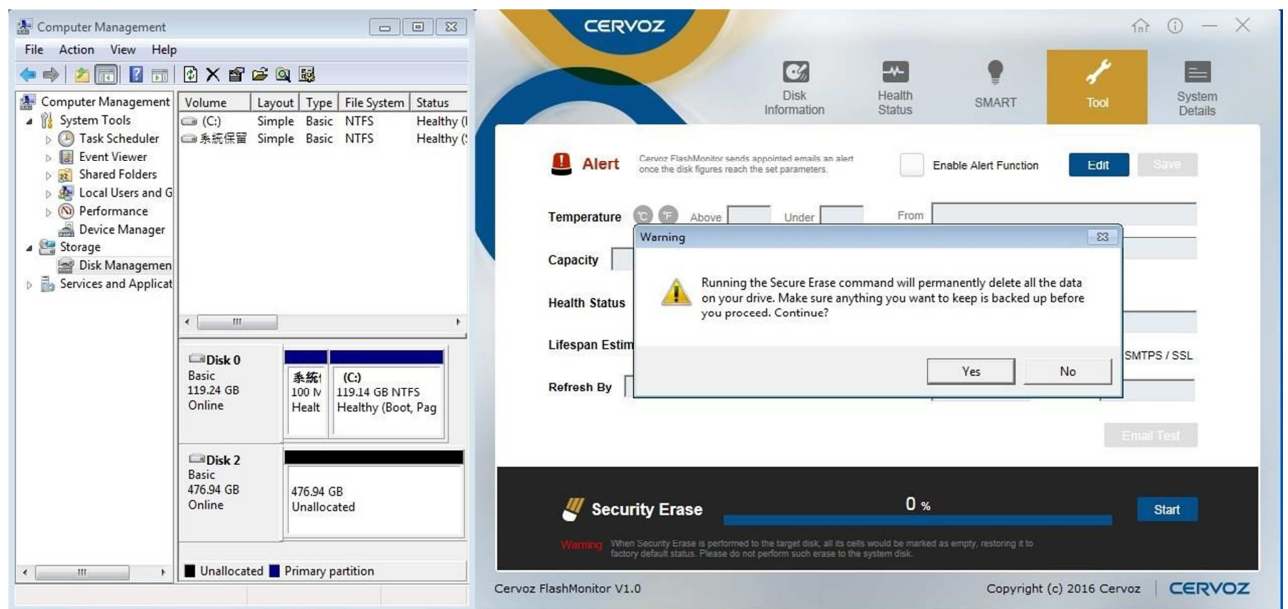

2. Automatic program execution is now in process, the start button is grayed out.

Once erase execution is completed, it shows 100%.

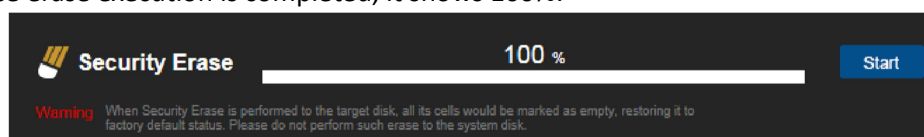


Note: Security Erase function can only be used on the subsidiary disks; it cannot be used on the host disk (stored with OS) of the platform.

10. System Details

The System Details page shows the detail information about the system:

1. Motherboard / System manufacturer, model name and version
2. BIOS brand, version and date
3. Processor information
4. Operating System information
5. Memory information
6. SATA Driver information
7. Solid State Drive / Hard Drive information

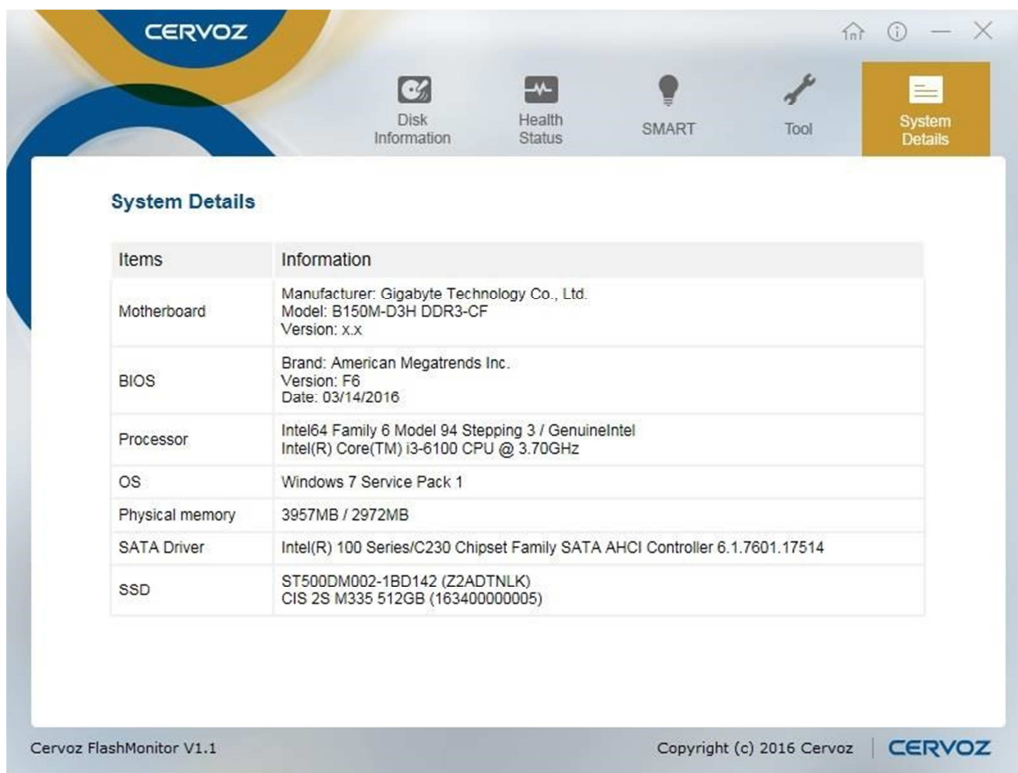

The screenshot displays the 'System Details' window of the Cervoz FlashMonitor V1.1 software. The window has a title bar with standard Windows controls and a menu bar with icons for Disk Information, Health Status, SMART, Tool, and System Details (which is currently selected). The main content area shows a table with the following data:

Items	Information
Motherboard	Manufacturer: Gigabyte Technology Co., Ltd. Model: B150M-D3H DDR3-CF Version: x.x
BIOS	Brand: American Megatrends Inc. Version: F6 Date: 03/14/2016
Processor	Intel64 Family 6 Model 94 Stepping 3 / GenuineIntel Intel(R) Core(TM) i3-6100 CPU @ 3.70GHz
OS	Windows 7 Service Pack 1
Physical memory	3957MB / 2972MB
SATA Driver	Intel(R) 100 Series/C230 Chipset Family SATA AHCI Controller 6.1.7601.17514
SSD	ST500DM002-1BD142 (Z2ADTNLK) CIS 2S M335 512GB (163400000005)

At the bottom of the window, the text 'Cervoz FlashMonitor V1.1' is on the left, 'Copyright (c) 2016 Cervoz' is in the center, and the 'CERVOZ' logo is on the right.